

高速鋼珠螺帽刀把 ER COLLET CHUCK (HIGH SPEED BEARING NUT)



5 RUN-OUT
μm
HIGH PRECISION

Balancing / 動平衡

Dimensions / 尺寸標示


G6.3

Max.30,000 RPM
Or $U \leq 1\text{gmm}$

Option / 選配

G2.5

Max.30,000 RPM
Or $U \leq 1\text{gmm}$

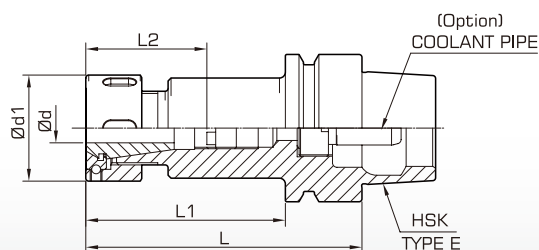

page.146

page.144

page.120

page.148



Order No. 訂購編號		Range ϕd 夾持範圍	$\phi d1$	L	L1	Tool Clamping Depth L2 刀具夾持深度	Nut 螺帽	Screw 調整螺絲	Collet 筒夾	Wrench 扳手
HSK40E	ER20-080BR	1.0~13.0	36	80	60	32~41	CAP-ER20BR	ER-M14	ER20-HP	PHS-ER20B
	ER25-080BR	1.0~16.0	43	80	60	35~40	CAP-ER25BR	ER-M18	ER25-HP	PHS-ER25
HSK50E	ER16-100BR	1.0~10.0	32	100	74	29~58	CAP-ER16BR	ER-M11	ER16-HP	PHS-ER16B
	ER20-100BR	1.0~13.0	36	100	74	32~59	CAP-ER20BR	ER-M14	ER20-HP	PHS-ER20B
	ER25-100BR	1.0~16.0	43	100	74	35~57	CAP-ER25BR	ER-M18	ER25-HP	PHS-ER25
	ER32-100BR	2.0~20.0	51	100	74	41~56	CAP-ER32BR	ER-M22	ER32-HP	PHS-ER32

Remarks / 備註

- 需配合 3 μ HP 筒夾 With 3 μ HP Grade Collet
- 若需搭配中心出水管，請參考 page.145 規格表
- 若需出水型刀把，請參考 page.26 選用說明

Applications / 應用



Drilling
鑽孔



Reaming
銓孔



Endmilling
銑削



Tapping
攻牙