



PFK 高速刀把

PFK HIGH SPEED COLLET CHUCK



Balancing / 動平衡

Dimensions / 尺寸標示


G6.3

Max.30,000 RPM
Or $U \leq 1\text{gmm}$

Option / 選配

G2.5

Max.30,000 RPM
Or $U \leq 1\text{gmm}$

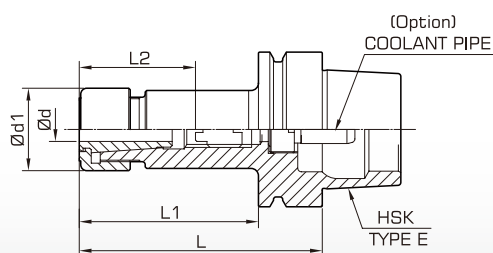

page.147

page.144

page.117

page.149



Nut
螺帽



Screw
調整螺絲



Collet
筒夾



Wrench
扳手

Order No. 訂購編號		Range ϕd 夾持範圍	$\phi d1$	L	L1	Tool Clamping Depth L2 刀具夾持深度				
HSK40E	PFK10-080S	1.75~10.0	27.5	80	60	max58.5	CAP-PFK10S	-	SK10P	PHS-10-TW275
	PFK16-080S	2.75~16.0	40	80	60	max49.5	CAP-PFK16S	-	SK16P	PHS-20-RO400
HSK50E	PFK10-100S	1.75~10.0	27.5	100	74	30~40	CAP-PFK10S	PFK-M12	SK10P	PHS-10-TW275
	PFK16-100S	2.75~16.0	40	100	74	40~48	CAP-PFK16S	PFK-M12	SK16P	PHS-20-RO400

Remarks / 備註

- 需配合 3 μ P 筒夾 With 3 μ P Grade Collet

Applications / 應用



Drilling
鑽孔



Reaming
鉋孔



Endmilling
銑削



Tapping
攻牙