

# PFK 高速刀把

## PFK HIGH SPEED COLLET CHUCK



**5** μm  
RUN-OUT  
HIGH PRECISION

Balancing / 動平衡

**G6.3**

SK40  
Max.25,000 RPM  
Or U ≤ 1gmm

Option / 選配  
**G2.5**

SK40  
Max.25,000 RPM  
Or U ≤ 1gmm


**G6.3**

SK50  
Max.20,000 RPM  
Or U ≤ 1gmm

Option / 選配  
**G2.5**

SK50  
Max.20,000 RPM  
Or U ≤ 1gmm

Dimensions / 尺寸標示

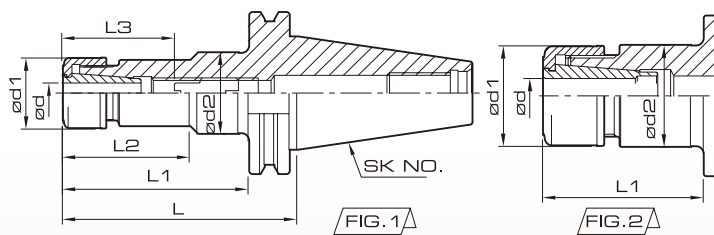

page.147

page.144

page.117

page.149

Order No. 訂購編號	FIG	Range 夾持範圍	ød1	ød2	L	L1	L2	Tool Clamping Depth L3 刀具夾持 深度	Nut 螺帽	Screw 調整螺絲	Collet 筒夾	Wrench 扳手	
													FIG
SK40	PFK10-090S	2	1.75~10.0	27.5	27.5	90	71	-	30~50	CAP-PFK10S	PFK-M12	SK10P	PHS-10-TW275
	PFK10-120S	1	1.75~10.0	27.5	32	120	101	70	30~50	CAP-PFK10S	PFK-M12	SK10P	PHS-10-TW275
	PFK16-090S	2	2.75~16.0	40	40	90	71	-	40~70	CAP-PFK16S	PFK-M18	SK16P	PHS-20-RO400
	PFK16-120S	2	2.75~16.0	40	40	120	101	-	40~70	CAP-PFK16S	PFK-M18	SK16P	PHS-20-RO400
SK50	PFK10-105S	1	1.75~10.0	27.5	32	105	86	70	30~50	CAP-PFK10S	PFK-M12	SK10P	PHS-10-TW275
	PFK10-135S	1	1.75~10.0	27.5	32	135	116	70	30~50	CAP-PFK10S	PFK-M12	SK10P	PHS-10-TW275
	PFK10-165S	1	1.75~10.0	27.5	32	165	146	75	30~50	CAP-PFK10S	PFK-M12	SK10P	PHS-10-TW275
	PFK16-105S	2	2.75~16.0	40	40	105	86	-	40~70	CAP-PFK16S	PFK-M18	SK16P	PHS-20-RO400
	PFK16-165S	1	2.75~16.0	40	50	165	146	95	40~70	CAP-PFK16S	PFK-M18	SK16P	PHS-20-RO400

Remarks / 備註

• 需配合 3μ P 筒夾 With 3μ P Grade Collet

Applications / 應用



Drilling  
鑽孔



Reaming  
鉸孔



Endmilling  
銑削



Tapping  
攻牙