


功能：

- 本體經調質及熱處理，增加本身之強度及增長使用壽命。
- 前端採用純質鎢鋼，增強頂心前端之精度與壽命。
- 鎢鋼與柄部之結合採國外先進技術，扭力特強。
- 鎢鋼之頂徑大，可適用於多樣孔徑之中心。
- 為適應客戶多層需要，標準規格中亦採用多種長短大小規格，方便您做多項條件之稱心選擇。
- 先端 60°與柄部斜度同心度在 0.003mm 以內，保證與您的機台或產品相得益彰，隨心所欲。

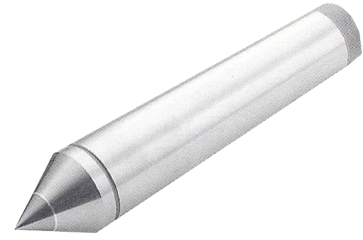


Features :

- The shank is tempered and hardened before grinding. Extends its strength and life.
- The inserted tungsten-carbide tip enhances the accuracy and life.
- The joint of tungsten-carbide tip and body is using advanced technology to ensure strong torsion force.
- The large diameter of tungsten-carbide tip provides wide range of center holes.
- Providing various specifications in standard series to meet various user's demands.
- The concentricity is in accordance with ISO to assure well compatibility with your machine.

### L 型 Model L 偏擺精度(Run out) ≤ 0.003

全周式大徑鎢鋼頂心  
適用於大徑中心孔工件

**FULL CNETER WITH FULL CARBIDE TIP.**  
**Suit for large center bore.**

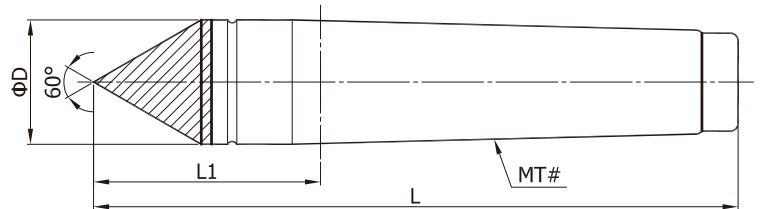

訂購編號 ORDER NO	MT#	ød	L1	L
MT2L180-46	2	18	46	110
MT2L240-46		24		
MT3L241-44	3	24.1	44	125
MT3L241-69			69	150
MT4L316-58	4	31.6	58	160.5
MT4L316-78			78	180.5
MT4L316-98			98	200.5