

高速鋼珠螺帽刀把

ER COLLET CHUCK

(HIGH SPEED BEARING NUT)



Balancing / 動平衡

G6.3


Max.25,000 RPM
Or $U \leq 1\text{mm}$

Option / 選配

G2.5

Max.25,000 RPM
Or $U \leq 1\text{mm}$

Dimensions / 尺寸標示

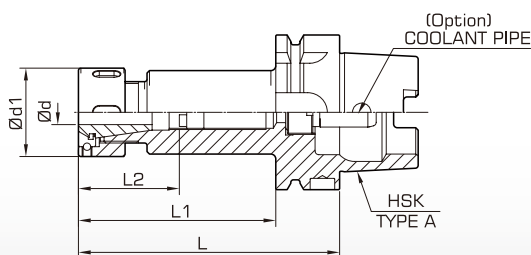

page.146

page.144

page.120

page.148

Order No. 訂購編號		Range 夾持範圍	ød1	L	L1	Tool Clamping Depth L2 刀具夾持深度	Nut 螺帽	Screw 調整螺絲	Collet 筒夾	Wrench 扳手
HSK50A	ER16-100BR	1.0~10.0	32	100	74	29~58	CAP-ER16BR	ER-M11	ER16-HP	PHS-ER16B
	ER32-100BR	2.0~20.0	51	100	74	41~56	CAP-ER32BR	ER-M22	ER32-HP	PHS-ER32
HSK63A	ER16-100BR	1.0~10.0	32	100	74	29~58	CAP-ER16BR	ER-M11	ER16-HP	PHS-ER16B
	ER16-160BR	1.0~10.0	32	160	134	29~58	CAP-ER16BR	ER-M11	ER16-HP	PHS-ER16B
	ER25-100BR	1.0~16.0	43	100	74	35~55	CAP-ER25BR	ER-M18	ER25-HP	PHS-ER25
	ER25-160BR	1.0~16.0	43	160	134	35~73	CAP-ER25BR	ER-M18	ER25-HP	PHS-ER25
	ER32-100BR	2.0~20.0	51	100	74	41~55	CAP-ER32BR	ER-M22	ER32-HP	PHS-ER32
	ER32-160BR	2.0~20.0	51	160	134	41~78	CAP-ER32BR	ER-M22	ER32-HP	PHS-ER32
HSK100A	ER16-100BR	1.0~10.0	32	100	71	29~58	CAP-ER16BR	ER-M11	ER16-HP	PHS-ER16B
	ER16-160BR	1.0~10.0	32	160	131	29~58	CAP-ER16BR	ER-M11	ER16-HP	PHS-ER16B
	ER25-100BR	1.0~16.0	43	100	71	35~53	CAP-ER25BR	ER-M18	ER25-HP	PHS-ER25
	ER25-160BR	1.0~16.0	43	160	131	35~73	CAP-ER25BR	ER-M18	ER25-HP	PHS-ER25
	ER32-100BR	2.0~20.0	51	100	71	41~49	CAP-ER32BR	ER-M22	ER32-HP	PHS-ER32
	ER32-160BR	2.0~20.0	51	160	131	41~78	CAP-ER32BR	ER-M22	ER32-HP	PHS-ER32

Remarks / 備註

- 需配合 3μ HP 筒夾 With 3μ HP Grade Collet
- 若需搭配中心出水管，請參考 page.145 規格表
- 若需出水型刀把，請參考 page.26 選用說明

Applications / 應用



Drilling
鑽孔



Reaming
鉋孔



Endmilling
銑削



Tapping
攻牙