

PFK 筒夾刀把

PFK COLLET CHUCK



Balancing / 動平衡


G6.3

Max.30,000 RPM
Or U ≤ 1gmm

Option / 選配
G2.5

Max.30,000 RPM
Or U ≤ 1gmm

Dimensions / 尺寸標示

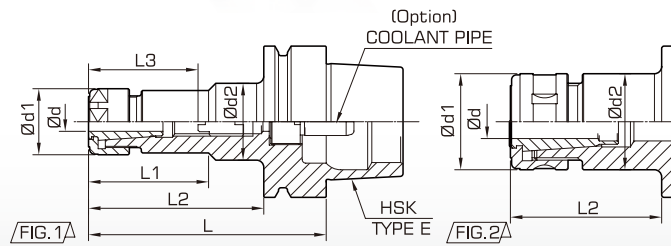

page.147

page.144

page.117

page.148



Order No. 訂購編號	FIG	Range 夾持範圍 ød	ød1	ød2	L	L1	L2	Tool Clamping Depth L3 刀具夾持深度	Nut 螺帽	Screw 調整螺絲	Collet 筒夾	Wrench 扳手
HSK40E	PFK6-080	2	0.7~6.0	19.5	19.5	80	-	60	21~30	CAP-PFK6	PHS-PFK6	PHS-PFK6
	PFK10-080	2	1.75~10.0	27.5	27.5	80	-	60	max58.5	CAP-PFK10	SK10P	PHS-PFK10
	PFK16-080	2	2.75~16.0	40	40	80	-	60	max49.5	CAP-PFK16	SK16P	PHS-PFK16
HSK50E	PFK6-100	1	0.7~6.0	19.5	32	100	63	74	21~35	CAP-PFK6	PHS-PFK6	PHS-PFK6
	PFK10-100	2	1.75~10.0	27.5	27.5	100	-	74	30~40	CAP-PFK10	SK10P	PHS-PFK10
	PFK16-100	2	2.75~16.0	40	40	100	-	74	40~48	CAP-PFK16	SK16P	PHS-PFK16

Remarks / 備註

- 需配合 3μ P 筒夾 With 3μ P Grade Collet

Applications / 應用



Drilling
鑽孔



Reaming
鉸孔



Endmilling
銑削



Tapping
攻牙